




鑫泰光电
XINTAI




Outdoor fixed installation LED display

The first choice for Outdoor
Advertising Billboards

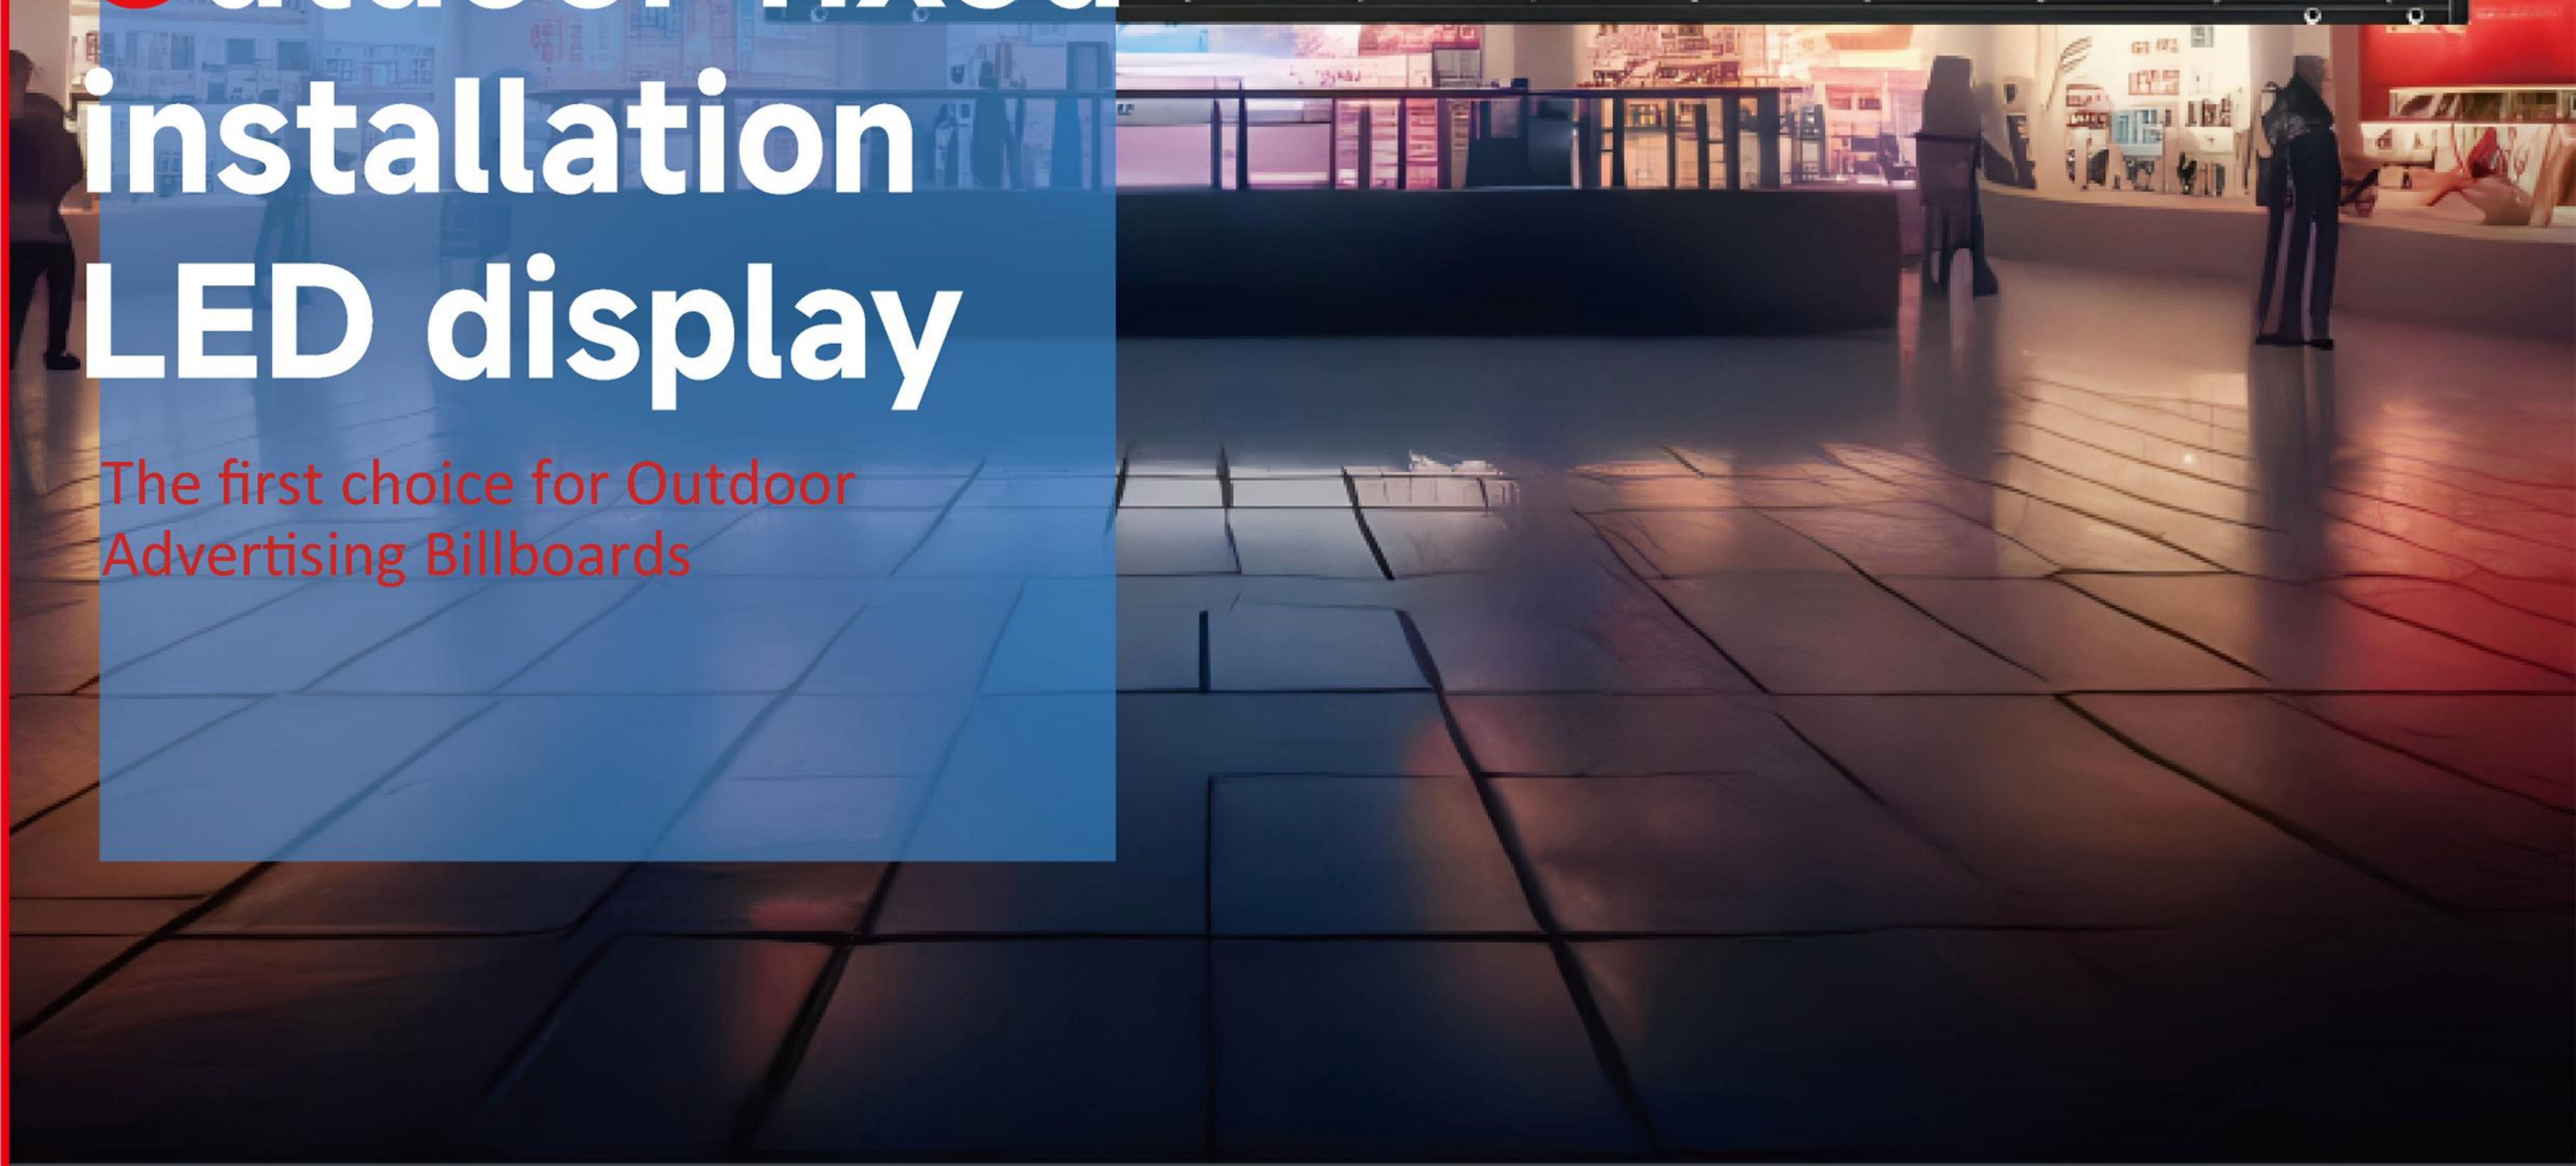



Lighter

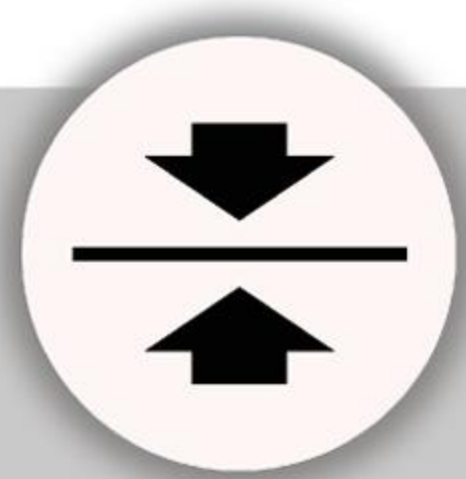

Thinner





Tougher



Faster

Ultra-light Weight & Slim : **30%** lighter than traditional outdoor led display

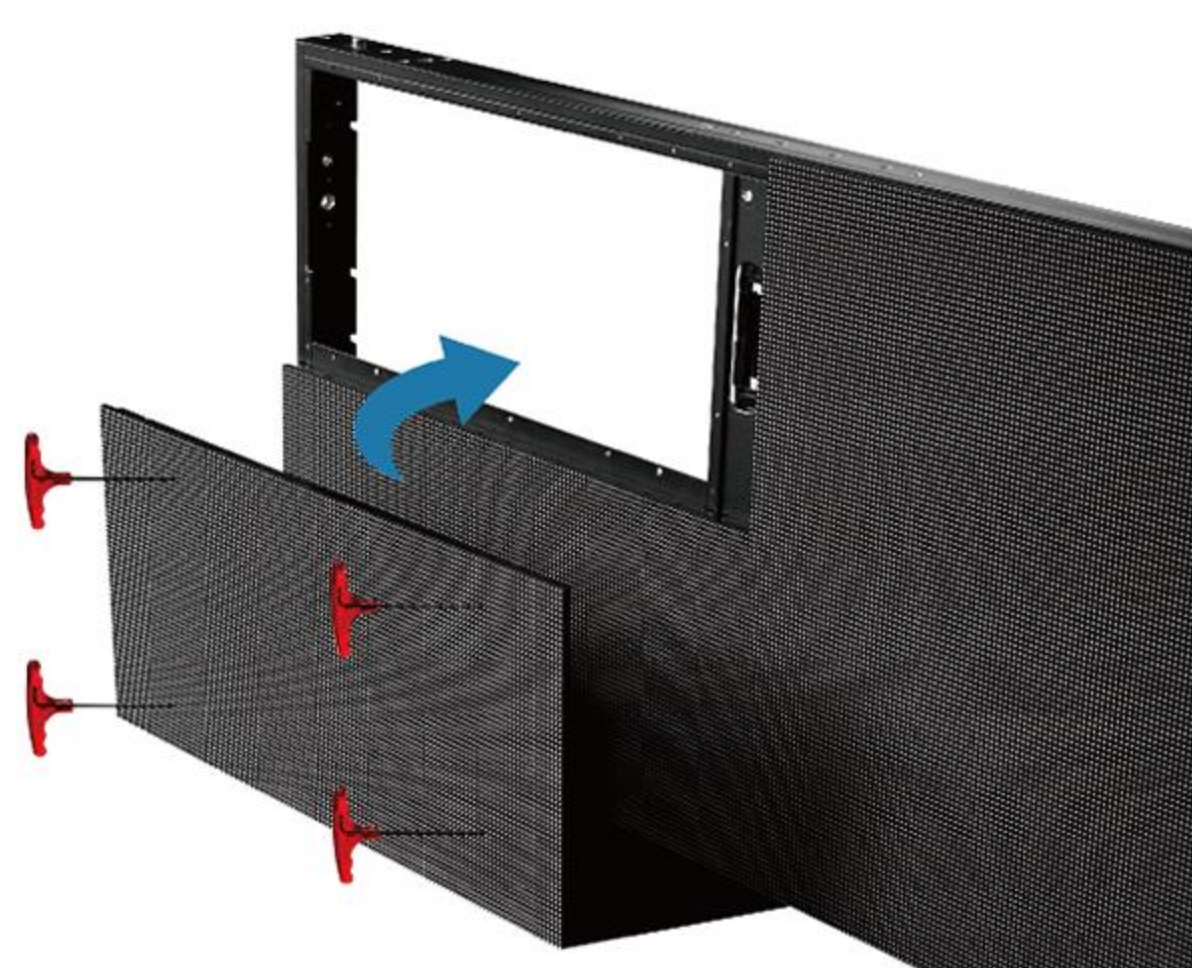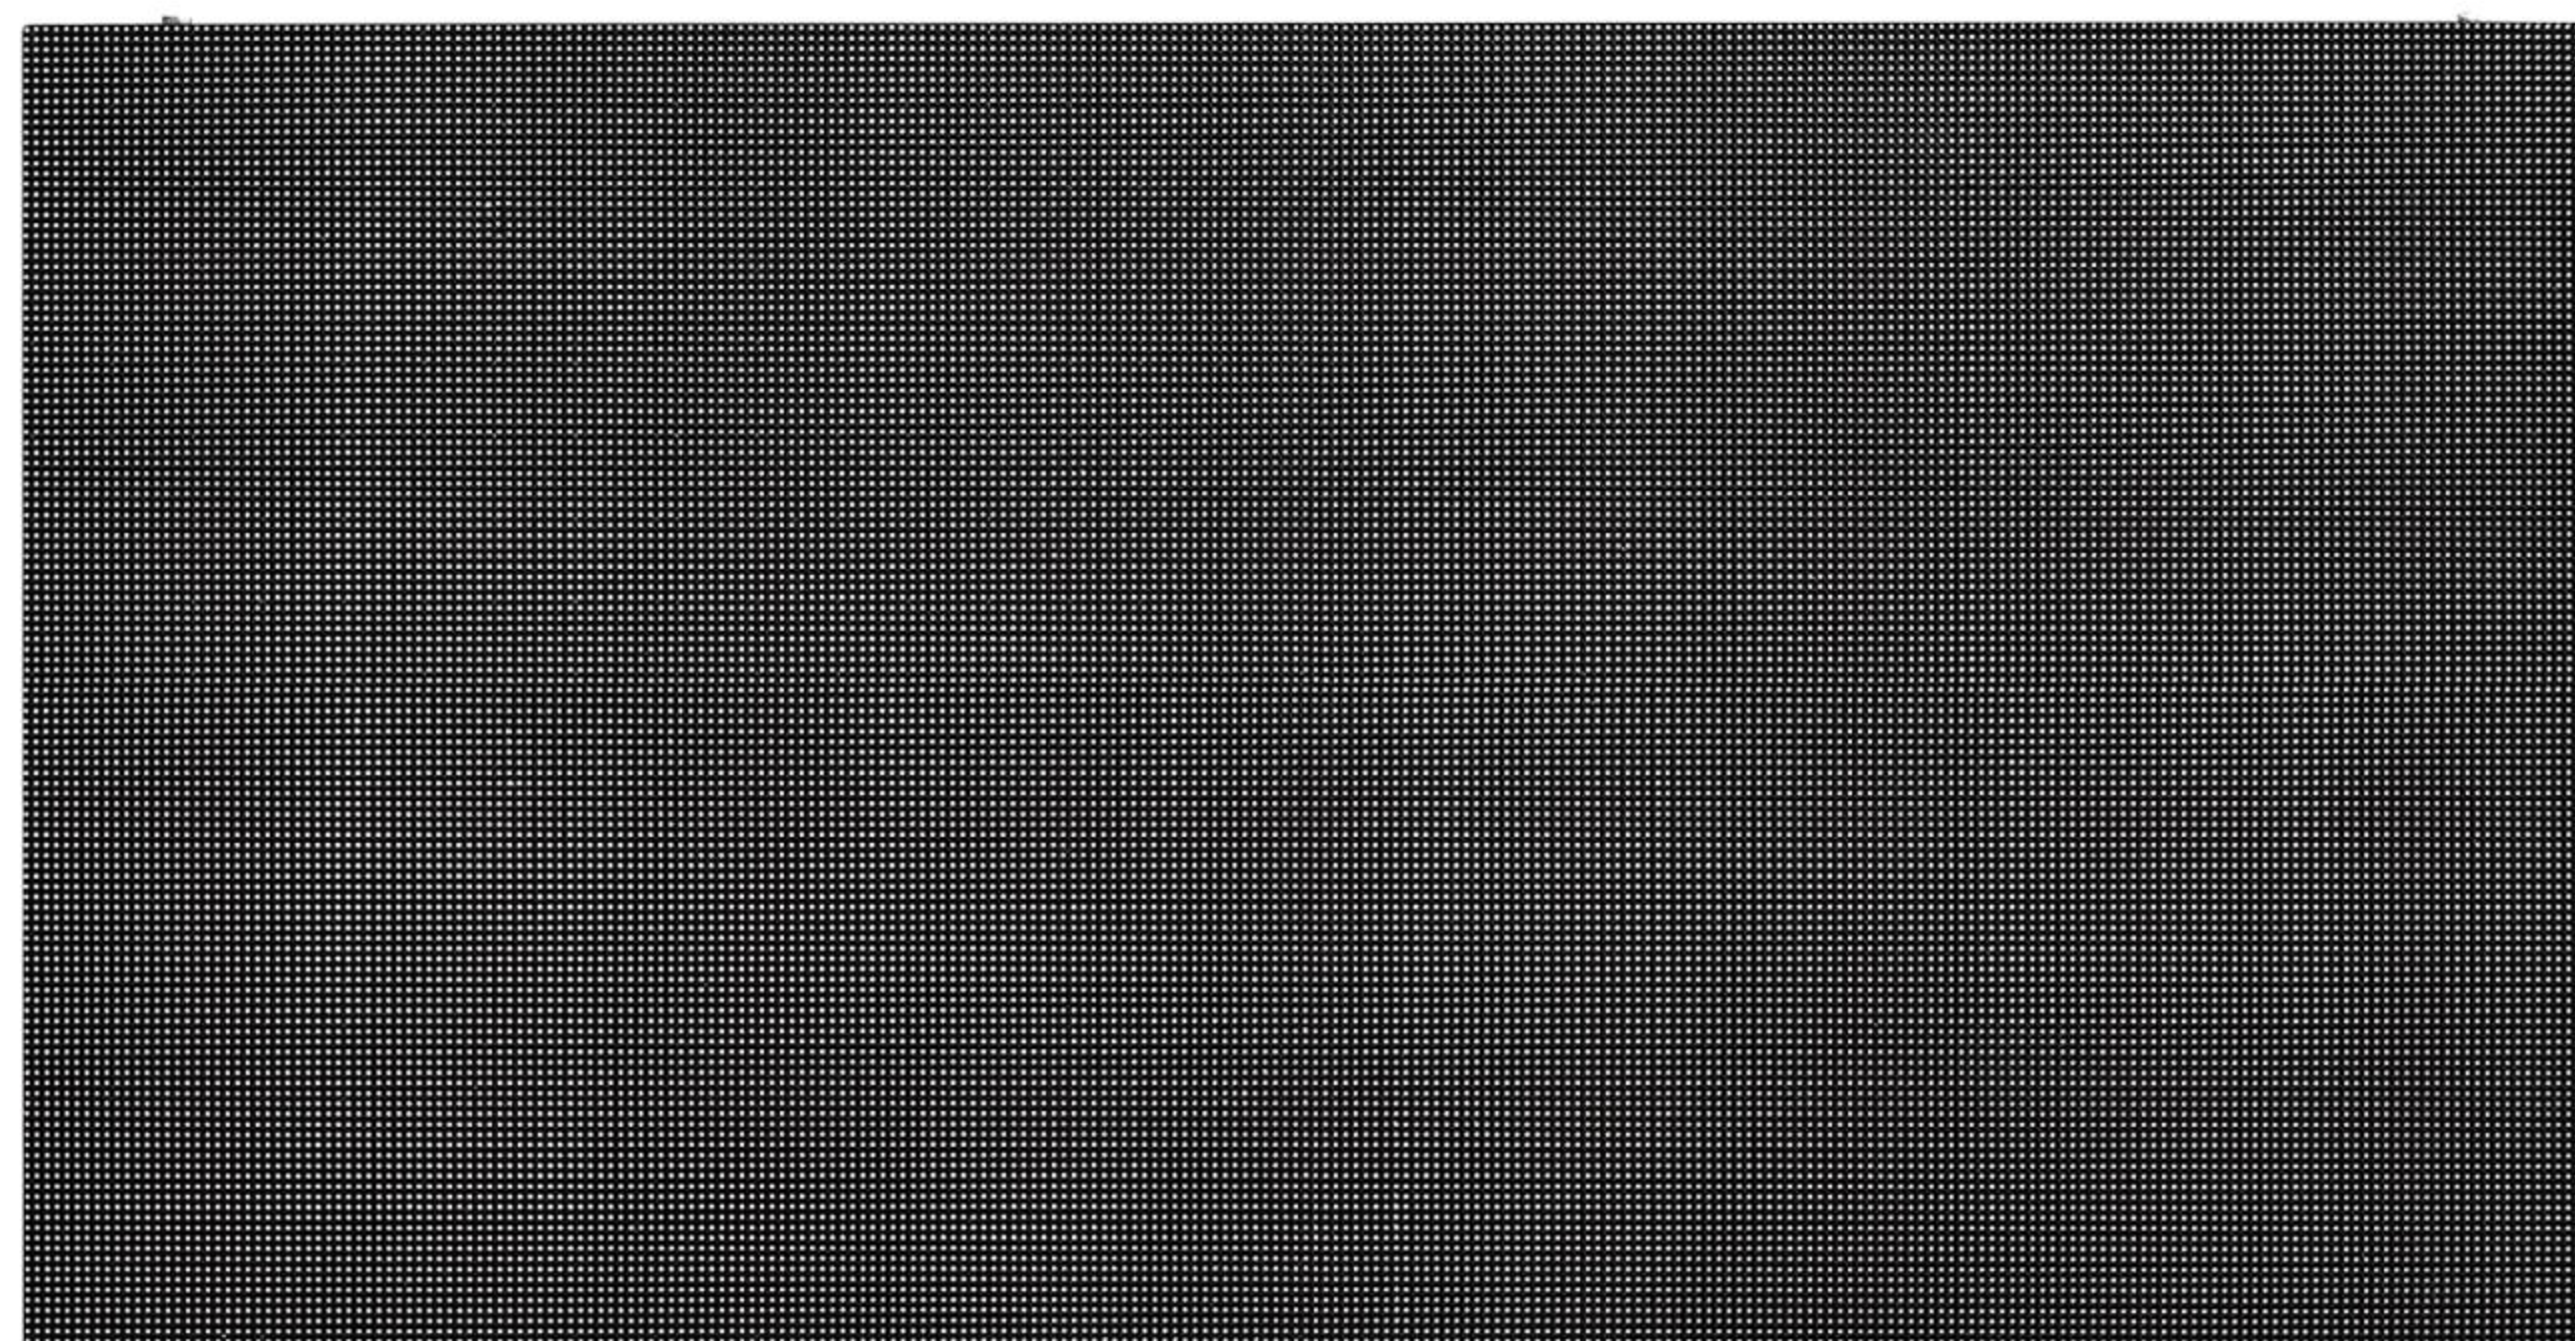

Front and Rear Maintenance



HUB Connection,



Airjack

Outdoor fixed installation LED display

The first choice for Outdoor
Advertising Billboards

Specifications

No	Items	Parameter on Outdoor Profile LED Screen				
1	Model	WH-3.91	WH-4.81	WH-5.2	WH-6.25	WH-10.4
2	Pixel Pitch	3.91*3.91mm	4.81*4.81mm	5.2*5.2mm	6.25*6.25mm	10.4*10.4mm
3	Scan mode	1/16 Scan	1/13 Scan	1/8 Scan	1/5 Scan	1/2 Scan
4	Pixel density	65,536dots/m ²	43,264dots/m ²	36,864dots/m ²	25,600dots/m ²	9,216dots/m ²
5	Pixel Component	1R1G1B				
6	Led lamp	SMD1921		SMD2727	SMD3535	
7	Brightness	>4000cd/m ²		>5000cd/m ²		
8	Module size	500*250mm				
9	Cabinet Size	1000*500/1000*1000mm				
10	Refresh Rate	>1920HZ				
11	Power	AVG: 230W/m ² , MAX: 800W/m ²				
12	Screen Weight	<22kg/m ²				
13	Protection grade	IP65+				
14	Flatness	Seam between modules is <0.1mm				
15	Lifespan	>100,000 hours				
16	Input Voltage	100-240V(±10%); AC 50-60HZ, three-phase five-wire system				
17	Working Condition	-10℃~+65℃, 10%~95%RH				
18	Viewing distance	4-250m				
19	Viewing angle	H 140°, V 140°				
20	Control System	NovaStar System, synchronize/asynchronous				

www.xintai-elec.com/en



鑫泰光电
XINTAI



86-0755 2943 8400



E-mail: info@xintai-elec.com



Building 6, Hongxing Industrial Park,
Shiyanyuanling, Baoan District, Shenzhen

